



2SA1943 SERIES

用途

- 应用于功率放大器

产品特性

- 高集电极电压: $V_{CEO}=230V$ (min)
 $V_{CEO}=250V$ (min)
- 与 2SC5200 互补
- 推荐用于 100W 音响频率放大器输出电路
- 环保 (RoHS) 产品


APPLICATIONS

- Power Amplifier Applications

FEATURES

- High collector voltage: $V_{CEO}=230V$ (min)
 $V_{CEO}=250V$ (min)
- Complementary to 2SC5200
- Recommended for 100W audio frequency amplifier output
- RoHS product

封装 Package

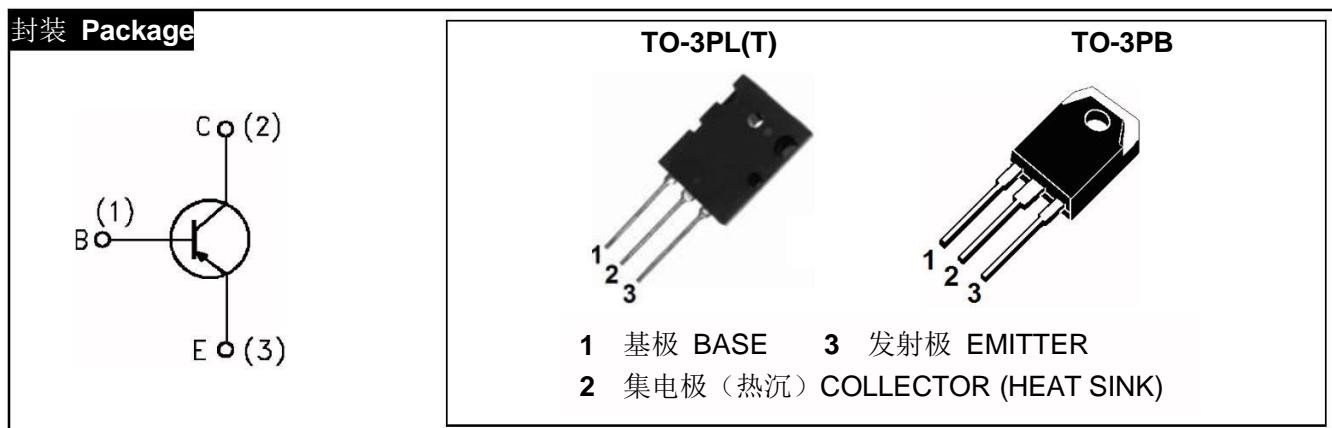

订货信息 ORDER MESSAGE

订货型号 Order codes	印 记 Marking	无卤素 Halogen Free	封 装 Package	包 装 Packaging	器件重量 Weight
2SA1943-O-AL-N-D	2SA1943	否 NO	TO-3PL(T)	泡沫盒 Foam Box	9.53g(typ)
2SA1943-O-AL-N-B	2SA1943	否 NO	TO-3PL(T)	条管 Tube	9.53g(typ)
2SA1943-O-AB -N-B	2SA1943	否 NO	TO-3PB	条管 Tube	6.03g(typ)
2SA1943A-O-AL-N-D	2SA1943	否 NO	TO-3PL(T)	泡沫盒 Foam Box	9.53g(typ)
2SA1943A-O-AL-N-B	2SA1943	否 NO	TO-3PL(T)	条管 Tube	9.53g(typ)
2SA1943A-O-AB -N-B	2SA1943	否 NO	TO-3PB	条管 Tube	6.03g(typ)
2SA1943B -O-AL-N-B	2SA1943	否 NO	TO-3PL(T)	条管 Tube	9.53g(typ)
2SA1943B -O-AL-N-D	2SA1943	否 NO	TO-3PL(T)	泡沫盒 Foam Box	9.53g(typ)
2SA1943B-O-AB -N-B	2SA1943	否 NO	TO-3PB	条管 Tube	6.03g(typ)
2SA1943C -O-AL-N-B	2SA1943	否 NO	TO-3PL(T)	条管 Tube	9.53g(typ)
2SA1943C -O-AL-N-D	2SA1943	否 NO	TO-3PL(T)	泡沫盒 Foam Box	9.53g(typ)
2SA1943C-O-AB -N-B	2SA1943	否 NO	TO-3PB	条管 Tube	6.03g(typ)



绝对最大额定值 ABSOLUTE RATINGS ($T_c=25^\circ\text{C}$ unless otherwise noted)

项目 Parameter	符号 Symbol	数值 Value				单位 Unit					
		-	A	B	C						
集电极—基极直流电压 Collector- Base Voltage	V_{CBO}	-230	-230	-350	-350	V					
集电极—发射极直流电压 Collector- Emitter Voltage	V_{CEO}	-230	-230	-250	-250	V					
发射极—基极直流电压 Emitter-Base Voltage	V_{EBO}	-5				V					
最大集电极电流 Collector Current	I_C	-15	-15	-16	-16	A					
最大基极电流 Base Current	I_B	-1.5		-1.6		A					
最大集电极耗散功率 TO-3PB Collector Dissipation($T_c=25^\circ\text{C}$)	P_C	120	150			W					
最大集电极耗散功率 TO-3PL Collector Dissipation($T_c=25^\circ\text{C}$)	P_C	160	200			W					
最高结温 Junction Temperature	T_j	150				°C					
贮存温度 Storage Temperature	T_{stg}	-65~150				°C					

电特性 ELECTRICAL CHARACTERISTIC

项目 Parameter	测试条件 Tests conditions	最小值 Value(min)			典型值 Value(typ)	最大值 Value(max)			单位 Unit		
		1943	A	B		1943	A	B			
I_{CBO}	$V_{CB}=-230(-300)\text{V}, I_E=0$	-			-	5.0@-230V	5.0@-300V	μA			
I_{EBO}	$V_{EB}=-5\text{V}, I_C=0$	-			-	-5.0			mA		
$V_{(BR)CEO}$	$I_C=-50\text{mA}, I_B=0$	-230	-250		-	-			V		
hFE	$V_{CE}=-5\text{V}, I_C=-0.5\text{A}$	-	75		-	135		-			
	$V_{CE}=-5\text{V}, I_C=-1.0\text{A}$	80	75		-	160	135		-		
	$V_{CE}=-5\text{V}, I_C=-3.0\text{A}$	-	75		-	135		-			
	$V_{CE}=-5\text{V}, I_C=-7.0\text{A}$	35	-		-	-			-		
$v_{CE(sat)}$	$I_C=-5.0\text{A}, I_B=-0.5\text{A}$	-			-	-1.0			V		
	$I_C=-8.0\text{A}, I_B=-0.8\text{A}$	-			-	-3.0	-		V		
V_{BE}	$V_{CE}=-5\text{V}, I_C=-7.0\text{A}$	-			-	-1.5			V		
f_T	$V_{CE}=-5\text{V}, I_C=-1.0\text{A}$	10	30	10	30	-	-			MHz	
C_{ob}	$V_{CE}=-10\text{V}, I_E=0, f=1\text{MHz}$	-			240	-			-	pF	

热特性 THERMAL CHARACTERISTIC


项目 Parameter	符号 Symbol	最小值 min	最大值 max	单位 Unit
2SA1943 2SA1943A				
结到管壳的热阻 Thermal Resistance Junction Case	TO-3PB	$R_{th(j-c)}$	-	1.042 °C/W
结到管壳的热阻 Thermal Resistance Junction Case	TO-3PL(T)	$R_{th(j-c)}$	-	0.781 °C/W
2SA1943B 2SA1943C				
结到管壳的热阻 Thermal Resistance Junction Case	TO-3PB	$R_{th(j-c)}$	-	0.83 °C/W
结到管壳的热阻 Thermal Resistance Junction Case	TO-3PL(T)	$R_{th(j-c)}$	-	0.625 °C/W





2SA1943 SERIES

特征曲线 ELECTRICAL CHARACTERISTICS(2SA1943 curves)

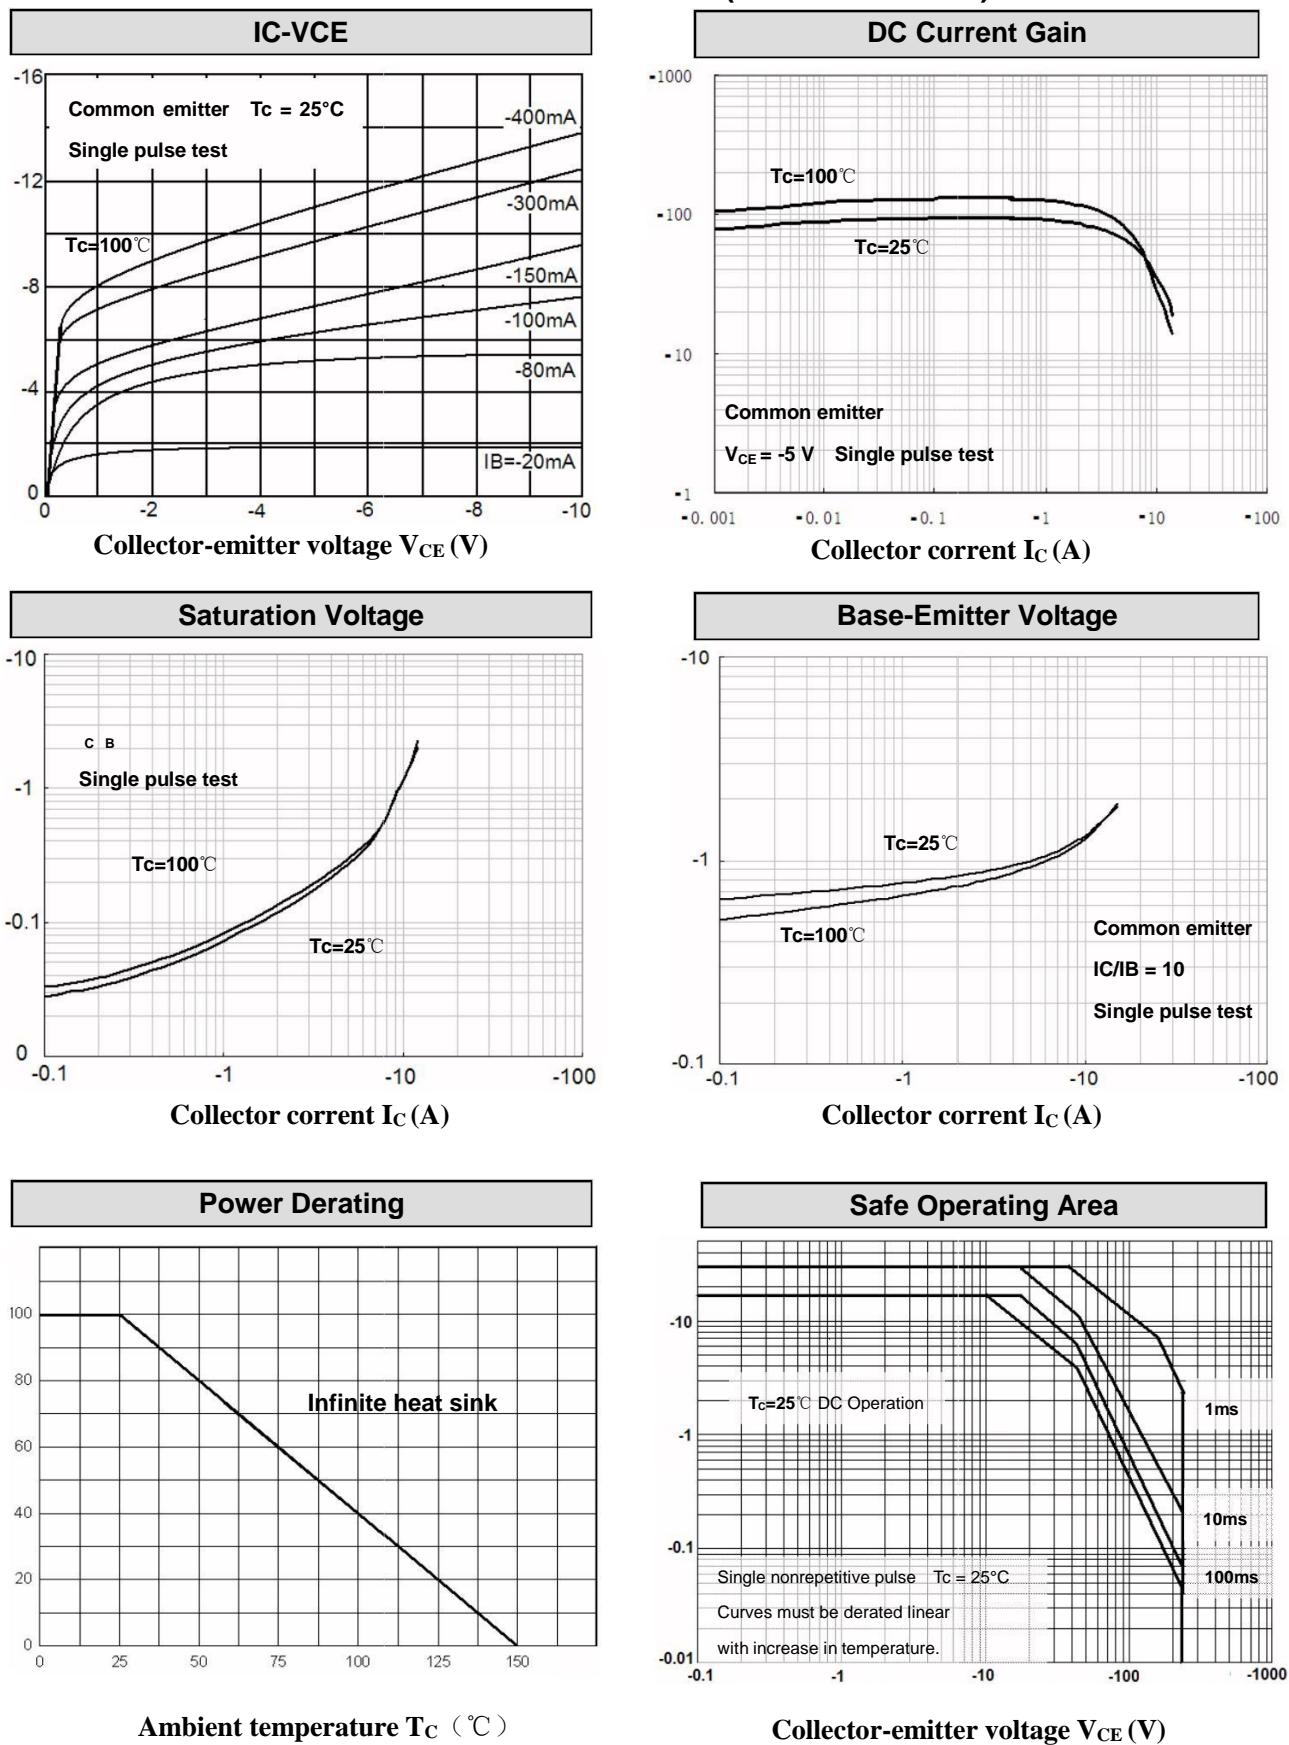





2SA1943 SERIES

特征曲线 ELECTRICAL CHARACTERISTICS (2SA1943A curves)

DC Current Gain

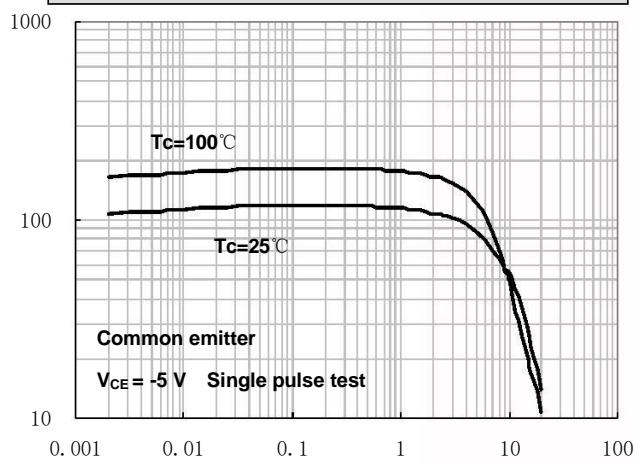


Saturation Voltage

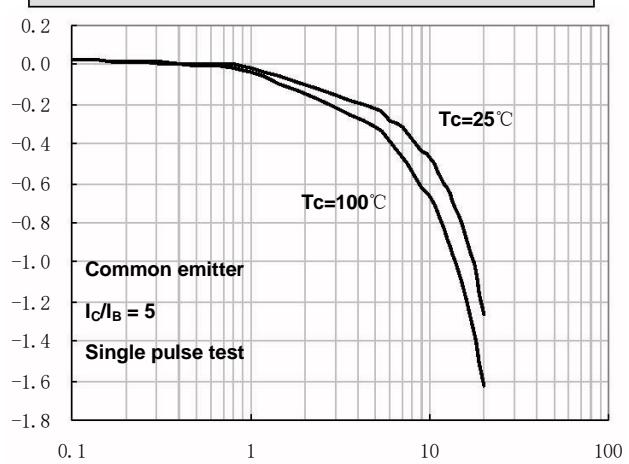

Collector current I_C (A)


Base-Emitter Voltage

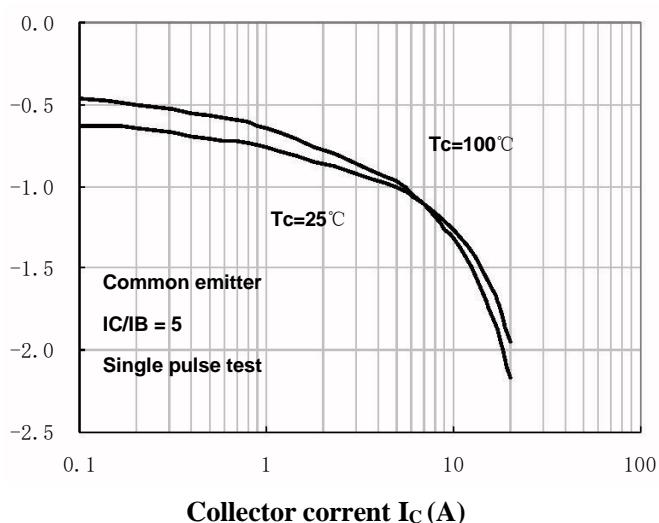

Collector current I_C (A)


Collector current I_C (A)

Power Derating

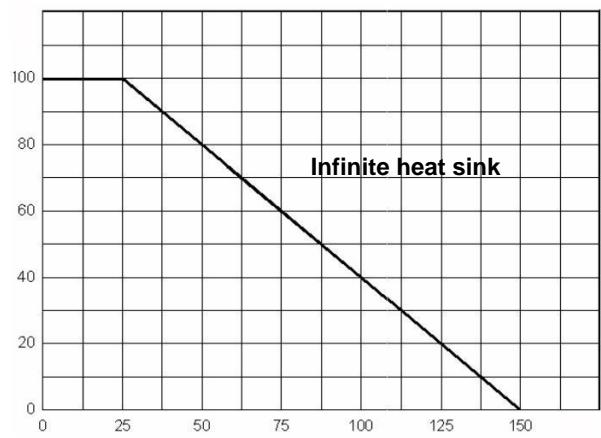

Ambient temperature T_c (°C)

Safe Operating Area

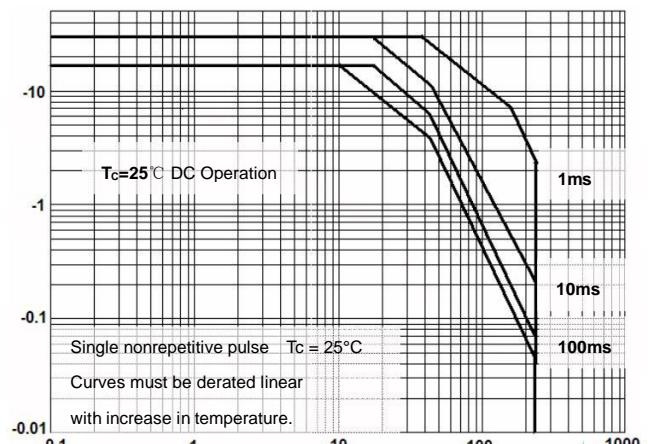

Collector-emitter voltage V_{CE} (V)






2SA1943 SERIES

特征曲线


ELECTRICAL CHARACTERISTICS (2SA1943B curves)

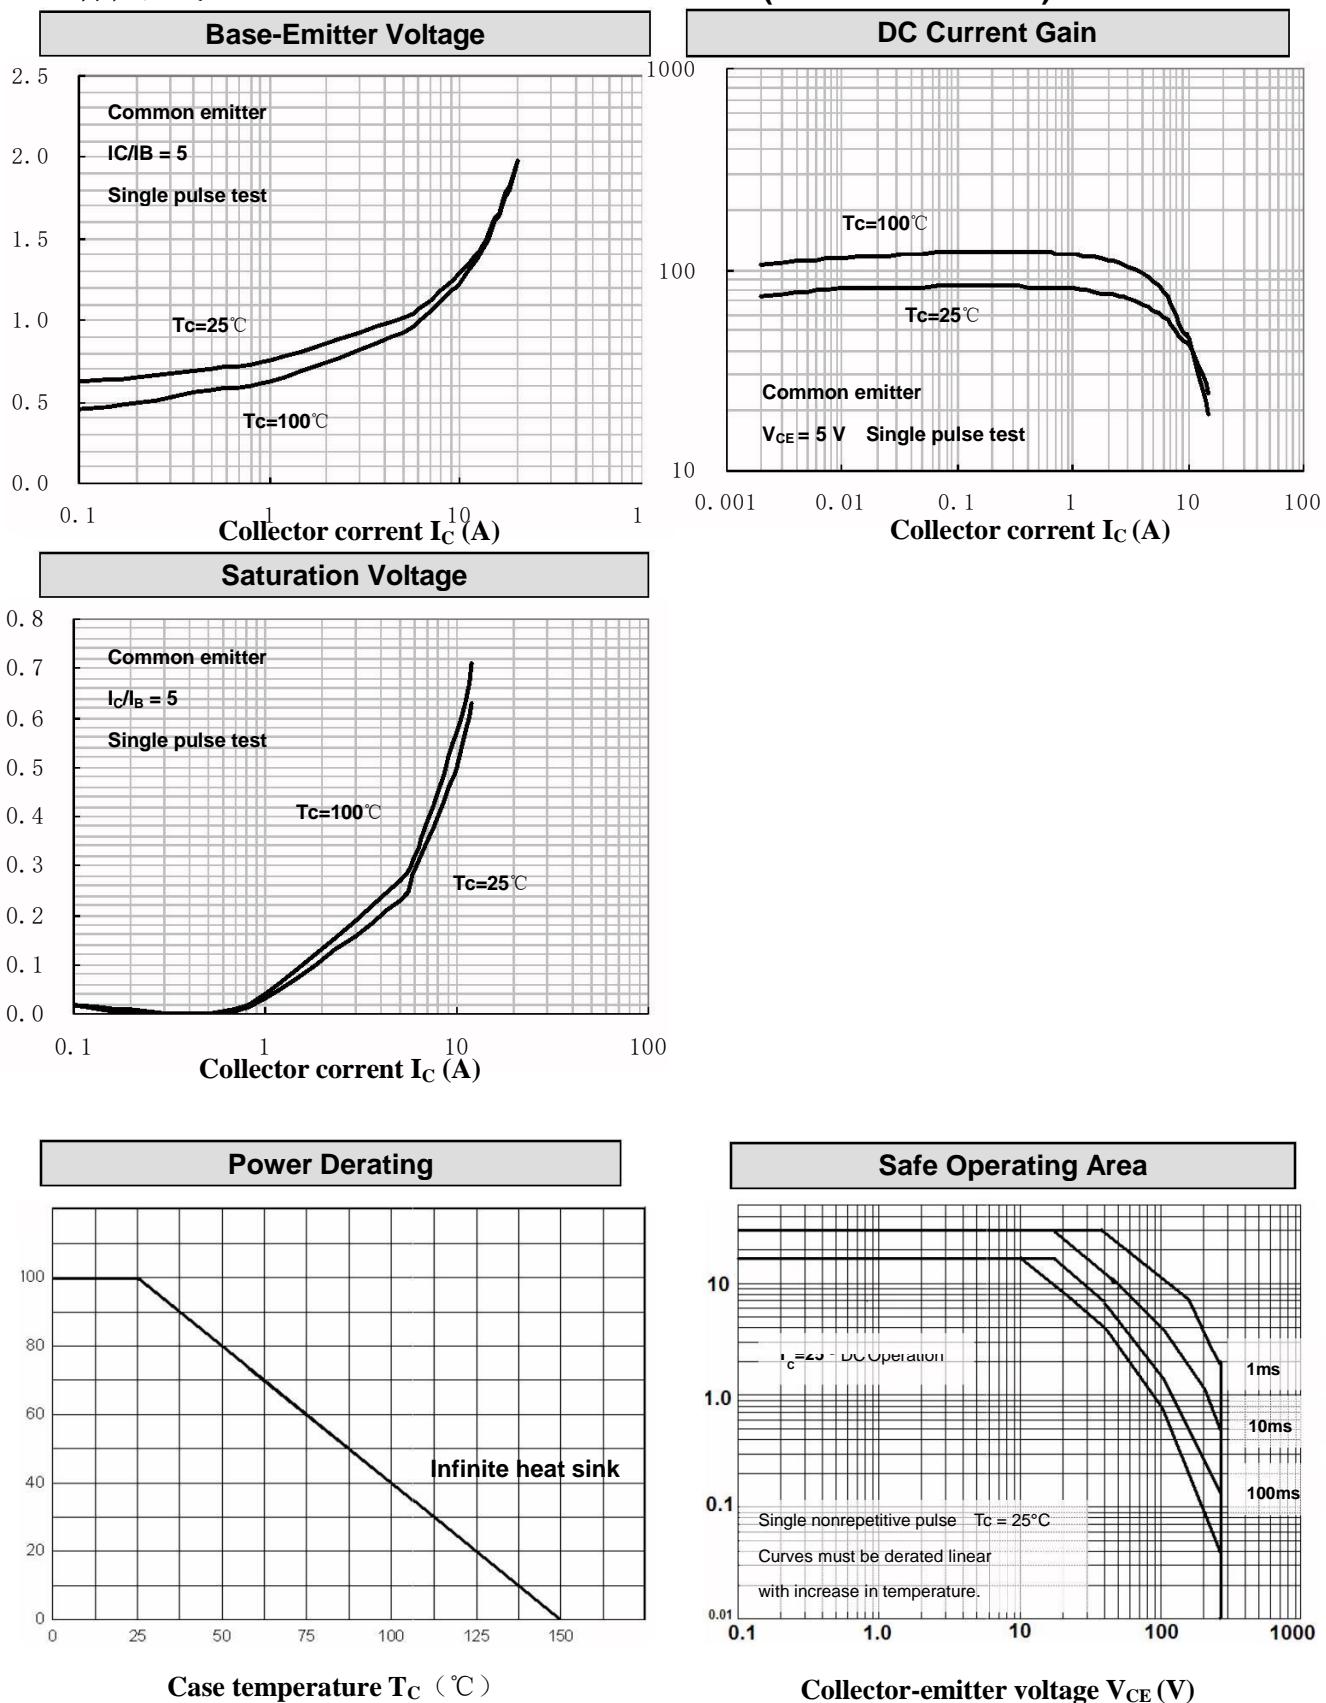




2SA1943 SERIES

特征曲线 ELECTRICAL CHARACTERISTICS (2SA1943C curves)

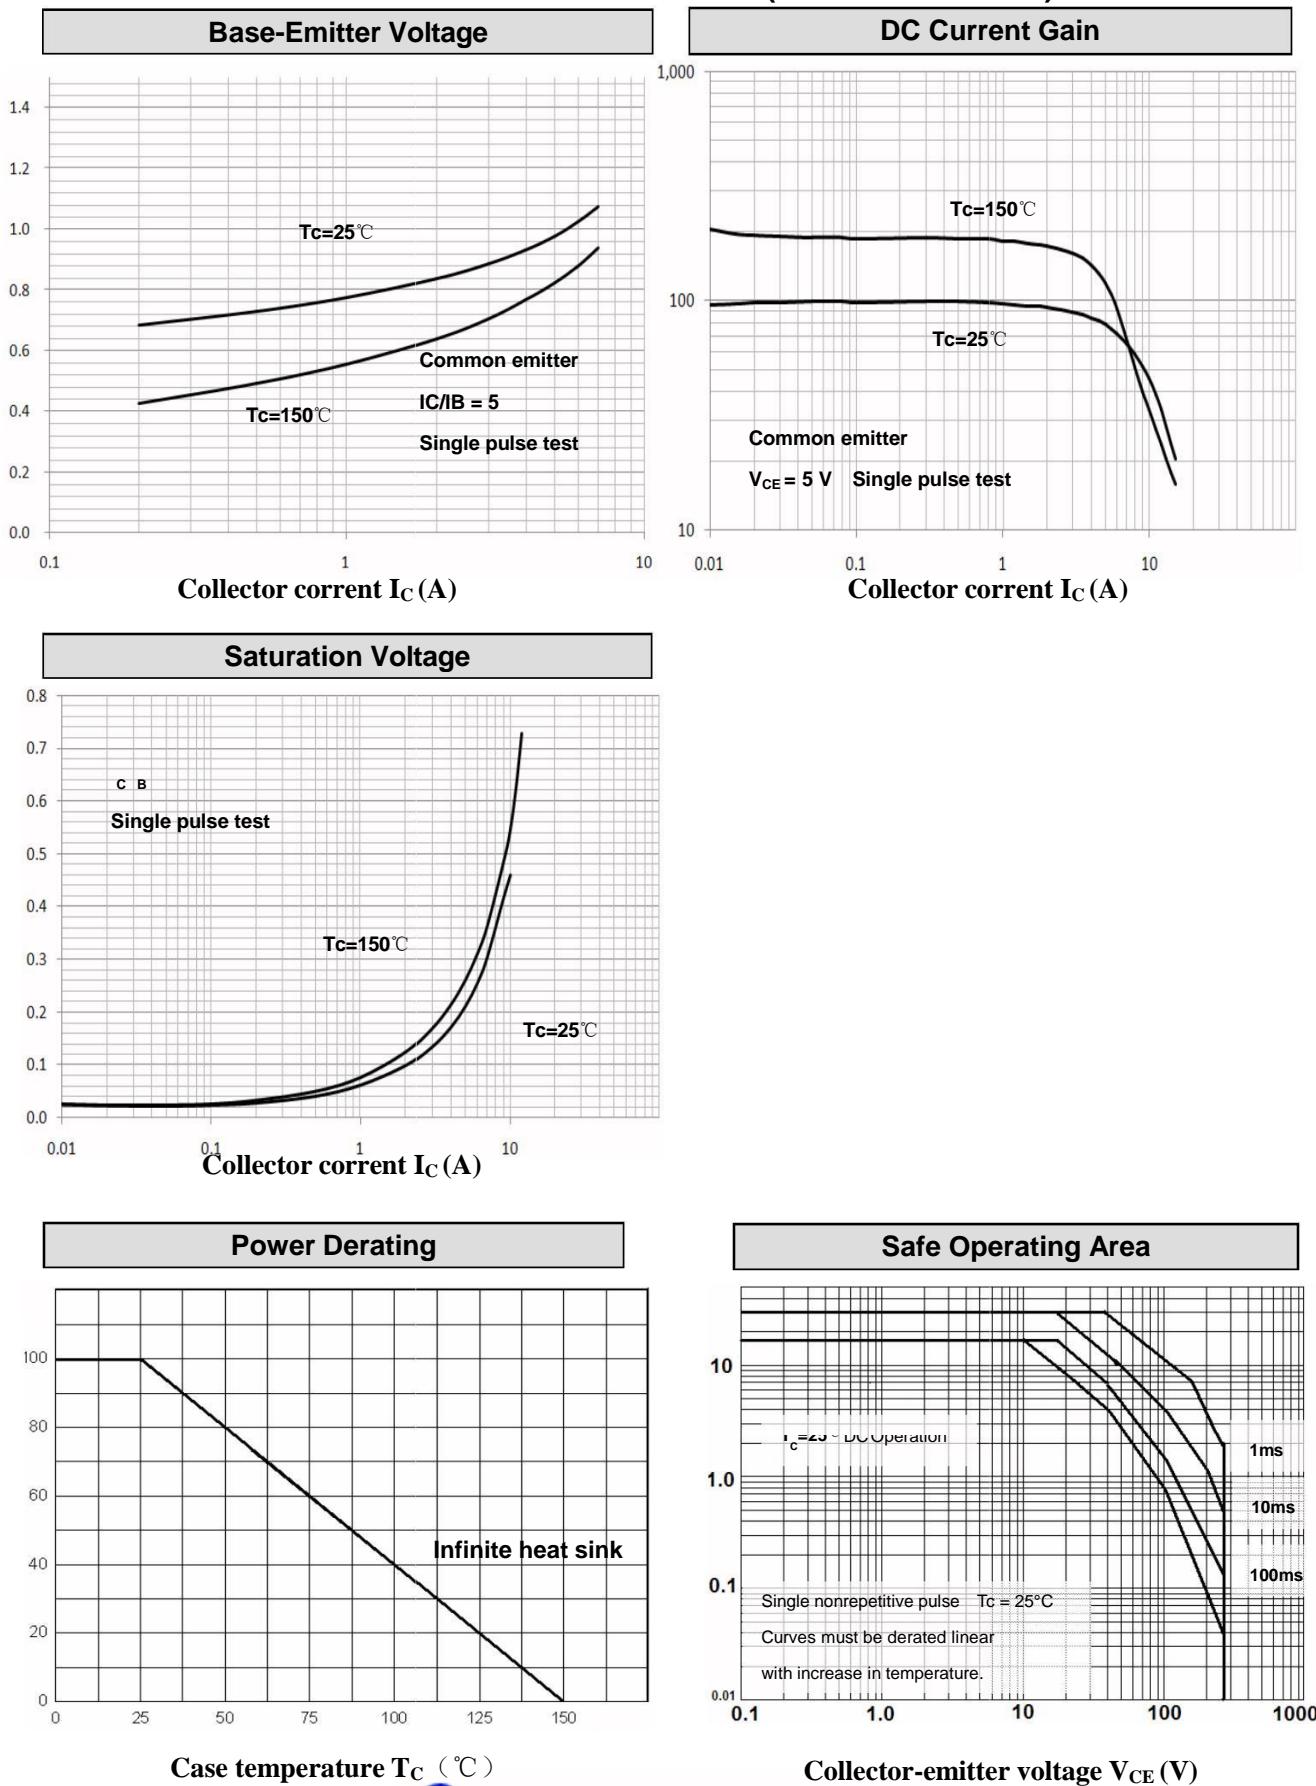

**外形尺寸 PACKAGE MECHANICAL DATA
TO-3PB**


单位 Unit : mm

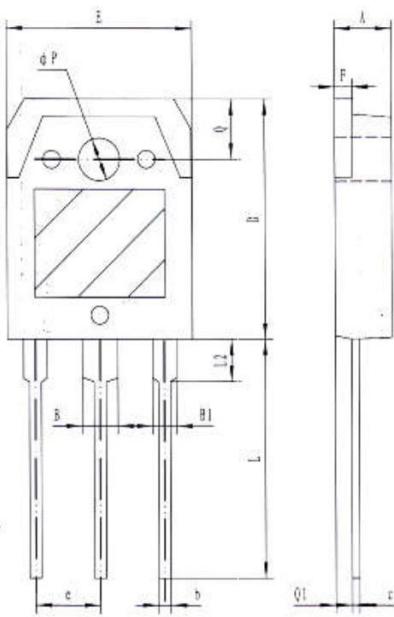

符号	尺寸 (mm)
A	4.60-5.00
B	2.90-3.20
B1	1.90-2.20
b	0.90-1.10
c	0.50-0.70
D	19.40-20.40
E	15.40-15.80
e	5.45(TYP)
F	1.40-1.60
L	19.50-20.50
L2	3.30-3.70
P	3.10-3.50
Q	4.90-5.10
Q1	1.30-1.50

**外形尺寸 PACKAGE MECHANICAL DATA
TO-3PL(T)**

单位 Unit : mm

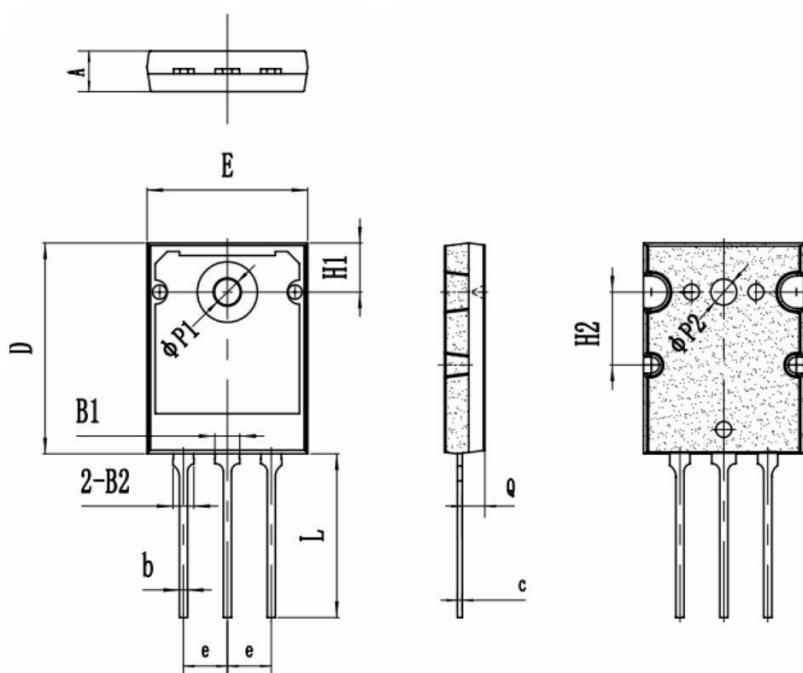

符号	尺寸 (mm)
A	4.70-5.30
B1	2.80-3.20
B2	2.30-2.70
b	0.80-1.25
c	0.59-0.61
D	25.5-26.5
E	19.5-20.5
e	5.45(typ)
H1	6.00-6.10
H2	8.95-9.05
L	20.0-20.4
Q	2.75-2.85
P1	3.45-3.55
P2	3.20-3.30



**注意事项**

1. 吉林华微电子股份有限公司的产品销售分为直销和销售代理，无论哪种方式，订货时请与公司核实。
2. 购买时请认清公司商标，如有疑问请与公司本部联系。
3. 在电路设计时请不要超过器件的绝对最大额定值，否则会影响整机的可靠性。
4. 本说明书如有版本变更不另外告知

NOTE

1. Jilin Sino-microelectronics co., Ltd sales its product either through direct sales or sales agent , thus, for customers, when ordering , please check with our company.
2. We strongly recommend customers check carefully on the trademark when buying our product, if there is any question, please don't be hesitate to contact us.
3. Please do not exceed the absolute maximum ratings of the device when circuit designing.
4. Jilin Sino-microelectronics co., Ltd reserves the right to make changes in this specification sheet and is subject to change without prior notice.

联系方式

吉林华微电子股份有限公司

公司地址：吉林省吉林市深圳街 99 号

邮编：132013

总机：86-432-64678411

传真：86-432-64665812

网址：www.hwdz.com.cn

市场营销部

地址：吉林省吉林市深圳街 99 号

邮编：132013

电话：86-432-64675588

64675688

64678411

传真：86-432-4671533

CONTACT

JILIN SINO-MICROELECTRONICS CO., LTD.

ADD: No.99 Shenzhen Street, Jilin City, Jilin Province, China.

Post Code: 132013

Tel: 86-432-64678411

Fax: 86-432-64665812

Web Site: www.hwdz.com.cn

MARKET DEPARTMENT

ADD: No.99 Shenzhen Street, Jilin City, Jilin Province, China.

Post Code: 132013

Tel: 86-432-64675588

64675688

64678411

Fax: 86-432-64671533

附录 (Appendix) : 修订记录 (Revision History)

日期 Date	旧版本 Last Rev.	新版本 New Rev.	修订内容 Description of Changes
2016-3-16		201603A	

